

## 4x4 802.11b/g/n Mini PCIe WiFi Module

Standard size form factor

**Model: WLE1216V2-20**



### KEY FEATURES

- Qualcomm Atheros 'Cascade' QCA9984
- 2.4GHz max 20dBm output power (per chain)
- Heat sink allows free air operation
- IEEE 802.11b/g/n compliant, up to 800Mbps
- Multi-user MIMO (MU-MIMO) beamformer
- Mini PCI Express 2.0 interface
- Supports Spatial Multiplexing, Cyclic-Delay Diversity (CDD), Low-Density Parity Check (LDPC) Codes, Maximal Ratio Combining (MRC), Space Time Block Code (STBC)
- Supports IEEE 802.11d, e, h, i, j, k, r, u, v time stamp, w, and z standards
- Designed for High Bandwidth Enterprise Wireless Access Points

## Specifications

Chipset	QCA9984
System Memory	256Kbit serial I <sup>2</sup> C bus EEPROM
Host Interface	Mini PCI Express 2.0 Standard
Operating Voltage	3.3V
Antenna Connector	4x U.FL
Frequency Range	2.412 ~ 2.472 GHz
Power Consumption	6.68W (Max)
Supported Operating System	CompeXWRT or OpenWRT/LEDE
Modulation Techniques	CCK, OFDM: BPSK, QPSK, 16-QAM, 64-QAM
Temperature Range	Operating: -20°C to 70°C Storage: -40°C to 90°C
Humidity	Operating: 5% to 95% (non-condensing) Storage: Max. 90% (non-condensing)
ESD Sensitivity	Class 1B
Dimensions (W x H x D)	29.9 x 50.8 x 12.9 mm


## RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	26dBm	±2dB
	2Mbps	20dBm	26dBm	±2dB
	5.5Mbps	20dBm	26dBm	±2dB
	11Mbps	20dBm	26dBm	±2dB
2.4GHz 802.11g	6Mbps	20dBm	26dBm	±2dB
	9Mbps	20dBm	26dBm	±2dB
	12Mbps	20dBm	26dBm	±2dB
	18Mbps	20dBm	26dBm	±2dB
	24Mbps	19dBm	25dBm	±2dB
	36Mbps	19dBm	25dBm	±2dB
	48Mbps	18dBm	24dBm	±2dB
	54Mbps	17dBm	23dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	20dBm	26dBm	±2dB
	MCS 1	20dBm	26dBm	±2dB
	MCS 2	20dBm	26dBm	±2dB
	MCS 3	20dBm	26dBm	±2dB
	MCS 4	19dBm	25dBm	±2dB
	MCS 5	18dBm	24dBm	±2dB
	MCS 6	17dBm	23dBm	±2dB
	MCS 7	16dBm	22dBm	±2dB
	MCS8	15dBm	21dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	26dBm	±2dB
	MCS 1	20dBm	26dBm	±2dB
	MCS 2	20dBm	26dBm	±2dB
	MCS 3	20dBm	26dBm	±2dB
	MCS 4	19dBm	25dBm	±2dB
	MCS 5	18dBm	24dBm	±2dB
	MCS 6	17dBm	23dBm	±2dB
	MCS 7	16dBm	22dBm	±2dB
	MCS 8	15dBm	21dBm	±2dB
	MCS 9	15dBm	21dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	-95dBm	±2dB
	2Mbps	-93dBm	±2dB
	5.5Mbps	-91dBm	±2dB
	11Mbps	-89dBm	±2dB
	6Mbps	-93dBm	±2dB
2.4GHz 802.11g	9Mbps	-90dBm	±2dB
	12Mbps	-88dBm	±2dB
	18Mbps	-85dBm	±2dB
	24Mbps	-83dBm	±2dB
	36Mbps	-80dBm	±2dB
	48Mbps	-77dBm	±2dB
	54Mbps	-73dBm	±2dB
	2.4GHz 802.11n HT20	MCS 0	-93dBm
MCS 1		-90dBm	±2dB
MCS 2		-87dBm	±2dB
MCS 3		-85dBm	±2dB
MCS 4		-81dBm	±2dB
MCS 5		-78dBm	±2dB
MCS 6		-76dBm	±2dB
MCS 7		-73dBm	±2dB
MCS 8		-69dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	-92dBm	±2dB
	MCS 1	-89dBm	±2dB
	MCS 2	-86dBm	±2dB
	MCS 3	-82dBm	±2dB
	MCS 4	-78dBm	±2dB
	MCS 5	-73dBm	±2dB
	MCS 6	-72dBm	±2dB
	MCS 7	-70dBm	±2dB
	MCS 8	-68dBm	±2dB
	MCS 9	-65dBm	±2dB

## Feature Guide

U.FL connectors

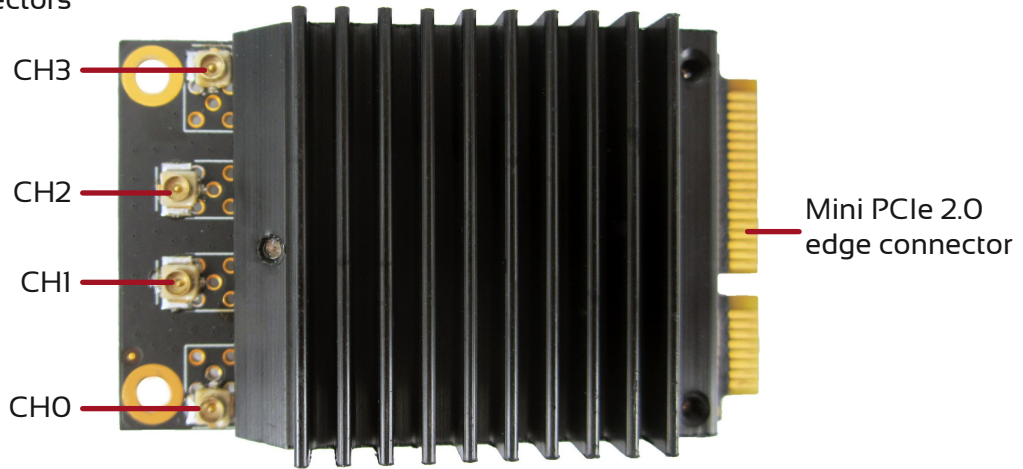

## Mechanical Dimensions

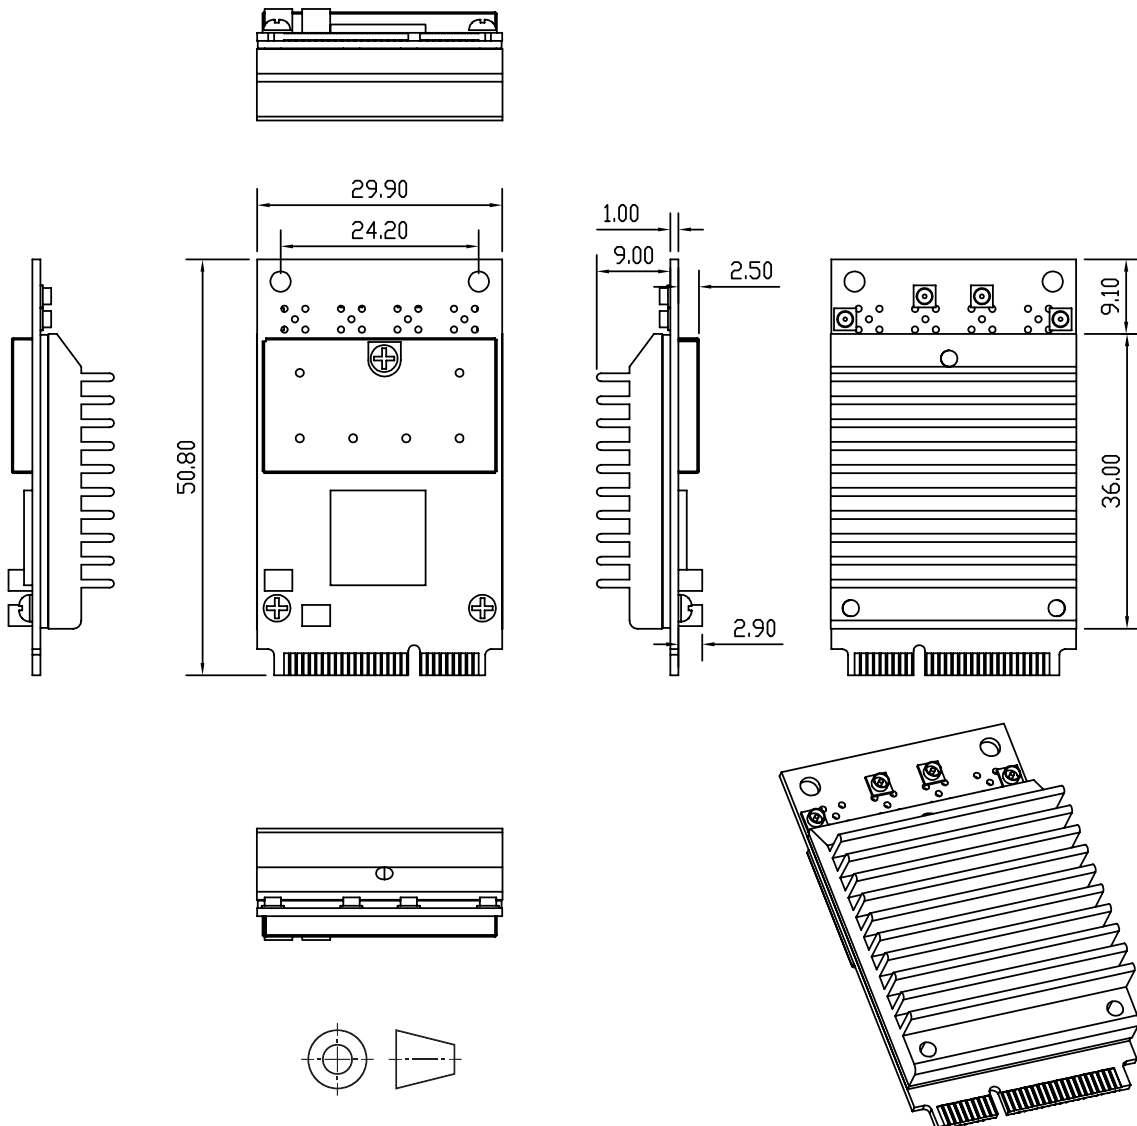

## Packaging Content

Item	Quantity
WLE1216V2-20 Wireless Module	1

## Ordering Configuration

Item Code	Chipset	Form Factor	Card Information
WLE1216V2-20 7A00001.01	QCA9984	Standard size card	4x4 802.11b/g/n 2.4GHz

## Packaging Information

Packaging Type	Dimensions	Weight	Dimensional Weight
Packing Box (50 units)	385 x 207 x 76 mm	1.514 kg	1.5 kg
Carton Box (5 packing boxes / 250 units)	422 x 410 x 240 mm	8.3 kg	9 kg