

5GHz 2x2 MU-MIMO 802.11ac Mini PCIe WiFi Module Designed for Next Generation 802.11ac Wave 2 Access Points



Model: WLE650V5-25A

KEY FEATURES

- Qualcomm Atheros QCA9888
- 5GHz max 25dBm output power (per chain)
- Heat sink allows free air operation
- 2x2 MIMO Technology, up to 867Mbps
- 2 spatial streams (2SS) at 80MHz bandwidth
- 1 spatial stream (1SS) at 80+80MHz bandwidth
- Built-in ESD Protection with ESD/EMP Immunity Threshold: 15KeV^[1]
- Supports Spatial Multiplexing, Cyclic Delay Diversity (CDD), Low-Density Parity-Check (LDPC) Codes, Maximal Ratio Combining (MRC), Space Time Block Code (STBC)
- Supports IEEE 802.11d, e, h, i, k, r, v time stamp, and w standards
- Supports Dynamic Frequency Selection (DFS)

Specifications


Chipset	QCA9888 ^[2]
System Memory	256Kbit serial I ² C bus EEPROM
Host Interface	Mini PCI Express 2.0 Standard
Operating Voltage	DC 3.3V, 5V ^[3]
Antenna Connector	2x MMCX
Frequency Range	5.180 ~ 5.825 GHz
Certification	TBD
Power Consumption	9.49W (Max)
Supported Operating System	ComplexWRT ≥ v3.1.3 or OpenWRT/LEDE kernel ≥ v4.13.0 on WPJ558/WPJ563/WPJ564 with 5V jumper, WPQ864, and WPQ865
Modulation Techniques	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Temperature Range	Operating: -20°C to 70°C Storage: -40°C to 90°C
Humidity	Operating: 5% to 95% (non-condensing) Storage: Max. 90% (non-condensing)
ESD Sensitivity	Class 1B
Dimensions (H x W x D)	50.8mm x 29.9mm x 12.2mm

[1] Module grounding cable included.


[2] Older prototypes may contain QCA9886.

[3] W The 5V is for the power amplifier (PA). The 5V jumper labels are J5, R309, and J18 on the WPJ558-A, WPJ563-A, and WPJ564-A boards respectively. Please enable 5V supply to the mPCIe card by shorting the 5V jumper next to the card slot on these boards.


Connector Map

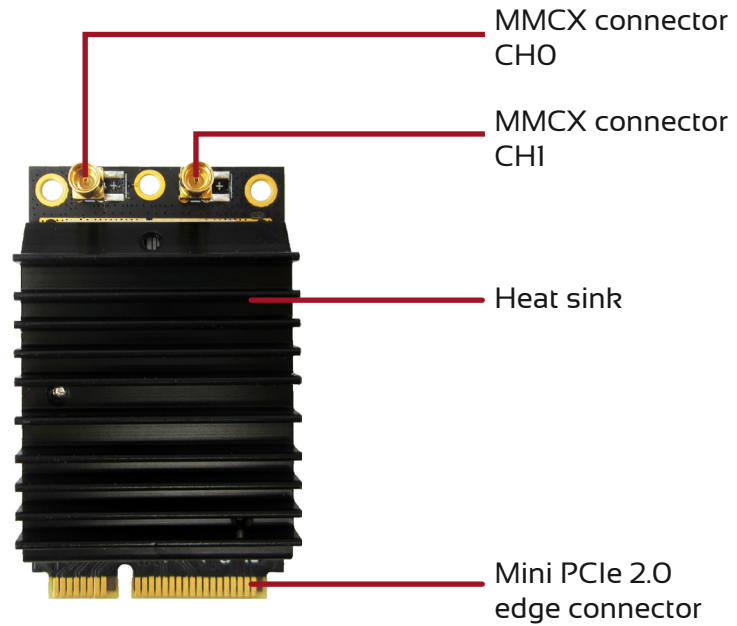

Mechanical Dimensions

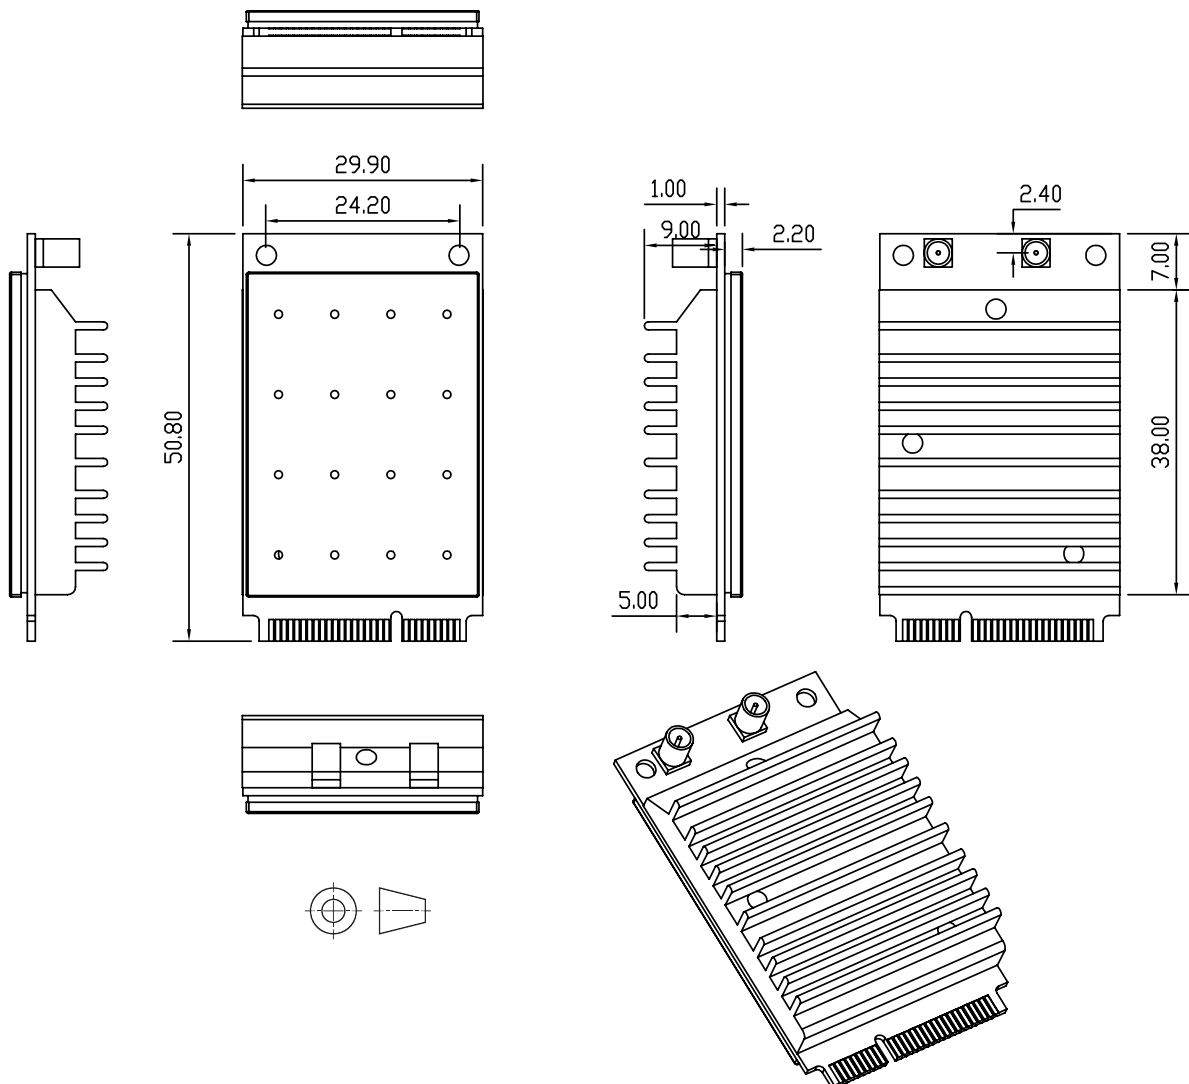

Heatsink Options

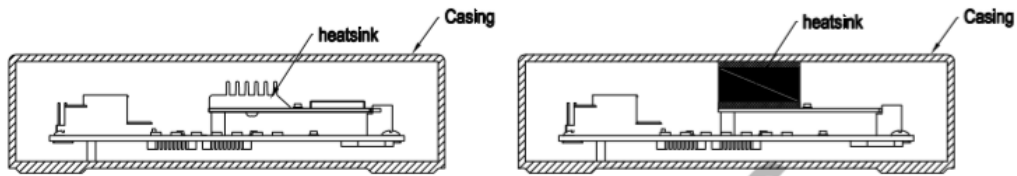

Ordering Configuration

Item Code	Model	Description
WLE650V5-25 7B0000	WLE650V5-25A	2x2 802.11a/n/ac 5GHz miniPCIe card with MMCX connectors