

# acWave

802.11ac Series – Gigabit WiFi Solutions

Full Products: **acStation** | **acJunior** | **acSpace** | **acMesh**

Components: **ac radio** | **ac board**




# Overview

## 11ac - 3x Faster & Smarter Wifi

As one of the pioneers in the OEM industry to leverage 11ac technology, Compex acWave series take Wi-Fi speeds to the pinnacle. 3x faster and more scalable, acWave also delivers expanded range, giving you more freedom than ever – excellent for point to point (PtP) and point to multi-point (PtMP) applications. More channel bonding, denser modulation, and more MIMO/spatial streams – all result in an unprecedented wifi speed of 1.3Gbps.

### 11ac vs 11n

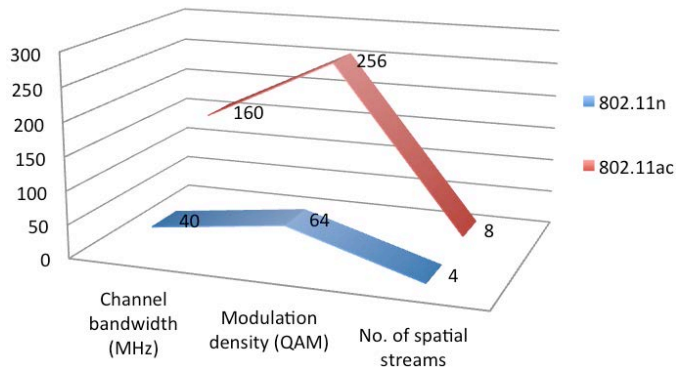

## Leading-Edge Industrial Design




Uniquely designed to be compact in size and elegant in style, Compex acWave features a pyramidal antenna that performs at its best regardless of where it is placed – on the table or mounted on the wall/ceiling, reducing customer intervention to the minimum. The pyramidal antenna is also designed to improve spatial diversity – improving signal strength and throughput over dipole antennas.

Low-cost, high-performing, and compact, the acWave series are extremely versatile and economical to deploy.

## Support for OpenWRT/CompexWRT

Seizing the advantages of both worlds, all Compex acWave radios are supported by ath10k on OpenWRT as well as CompexWRT. Based on OpenWRT architecture, CompexWRT makes it easy for OEM to adopt and modify. Fully compatible with DFS standards, it supports 16 Virtual Access Points per radio. In addition to modified LuCi Webpages, it boasts comprehensive SNMP parameters for monitoring and supports long distance applications.

## Perfect Fit for PtP & PtMP

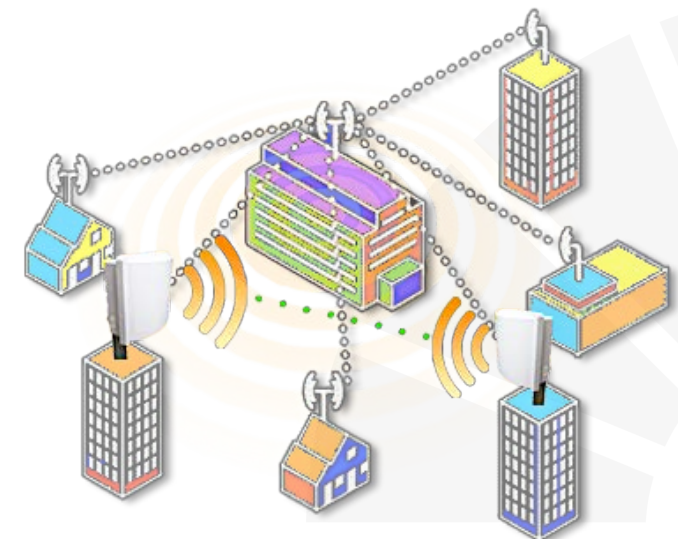


# Models



## Dual Radio Gigabit Embedded Board

<b>Model</b>	<b>WPJ344</b>
<b>Chipset</b>	Qualcomm-Atheros AR9344 533MHz MIPS74Kc
<b>Firmware</b>	CompexWRT & OpenWRT firmware supported
<b>Dual Radio</b>	On-board a/b/g/n radio & 1 miniPCIe slot that supports all Compex WLE series, including 802.11ac radio
<b>PoE</b>	Integrated 48V 802.3af (alternative 24V PoE available)
<b>Ethernet Port</b>	Support 2 x Gigabit Ethernet Ports

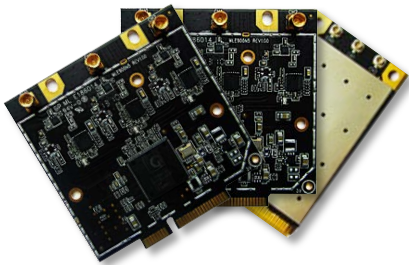

## 802.11ac miniPCIe Radio

Model	WLE600V5-18	WLE600V5-23	WLE900VX	WLE900V5-18	WLE900V5-23
<b>Chipset</b>	Qualcomm-Atheros QCA9882/QCA9892		Qualcomm-Atheros QCA 9880 Version 2		
<b>Reference Design</b>	TBD	TBD	XB140	XB143	CUS223 (High Power)
<b>Power (per chain)</b>	18dBm	23dBm	2.4GHz@19dBm 5GHz@18dBm	18dBm	23dBm
<b>Power (aggr.)</b>	21dBm	26dBm	2.4GHz@23dBm 5GHz@24dBm	23dBm	28dBm
<b>Speed</b>	2x2 MIMO & up to 867Mbps		3x3 MIMO & up to 1.3Gbps		
<b>Compliance</b>	IEEE 802.11ac compliant & backward compatible with a/n				
<b>Dimension (mm)</b>	50.95 x 30 x 3.2			50.95 x 30 x 3.2	



## acStation

<b>Model</b>	<b>acStation AC26</b>
<b>Board Type</b>	WPJ344 (AR9344) + WLE600N5-23 (AR9880)
<b>Frequency</b>	5GHz
<b>Power (aggregate)</b>	26dBm
<b>Gain</b>	19dBi directional antenna
<b>PoE</b>	Manufacturing option of 802.3af (48V) or 24V passive PoE

# Models



## acJunior

Model	acJunior AC21		acJuniorPlus AC21
<b>Board Type</b>	WPJ344 (AR9344) + WLE600V5-18 (AR9880)		
<b>Frequency</b>	5GHz	5GHz	2.4GHz
<b>Power (aggregate)</b>	21dBm	21dBm	18dBm
<b>Gain</b>	17dBi directional antenna	17dBi directional antenna	7dBi omni-directional antenna
<b>PoE</b>	Manufacturing option of 802.3af (48V) or 24V passive PoE		



## acSpace

Model	acSpace		acSpacePlus
<b>Board Type</b>	WPJ344 (AR9344) + WLE600V5-18 (AR9882)		
<b>Frequency</b>	5GHz	5GHz	2.4GHz
<b>Power (aggregate)</b>	21dBm	21dBm	18dBm
<b>Gain</b>	4-5dBi internal/pyramid antenna		
<b>PoE</b>	Manufacturing option of 802.3af (48V) or 24V passive PoE		



## acMesh


Model	acMesh MPS344		
<b>Type</b>	AP or MeshPoint		
<b>Frequency</b>	5GHz	2.4GHz	
<b>Power (aggregate)</b>	26dBm	18dBm	
<b>Gain</b>	6dBi H&V omni-directional antenna		
<b>PoE</b>	Manufacturing option of 802.3af (48V) or 24V passive PoE		




# Solutions/Applications

## Outdoor Solutions


### 1<sup>st</sup> Qualcomm Atheros 11ac PtP

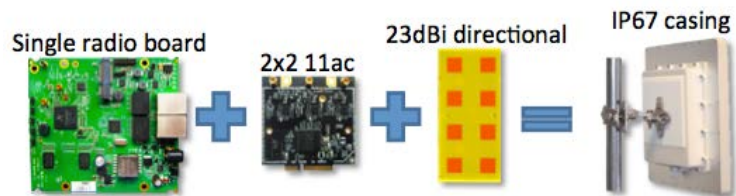

### 1<sup>st</sup> Qualcomm Atheros 11ac PtP + Coverage

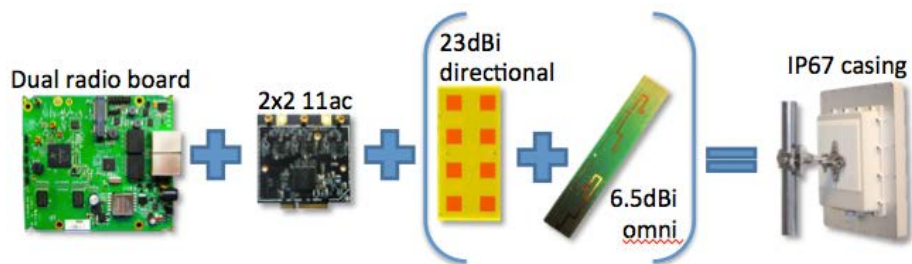

## Indoor Solution

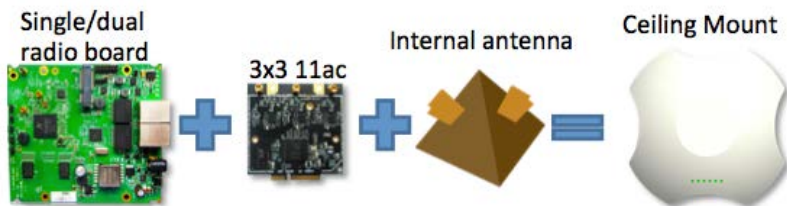

## Applications

With the advent of 802.11ac, a faster and more scalable version of 802.11n, Gigabit Ethernet offers unprecedented capabilities that fully liberate any wifi moments – ushering in tremendous improvements and benefits. Now, an AP can support more clients than ever before, the client embraces a more seamless experience and more available bandwidth. Not only do files download and emails sync at gigabit speeds, devices' WiFi interface can exchange data with its AP much faster, thus extending battery life.

Leveraging the 11ac technology, Compex acWave series are perfect for organizations reaching the limits of their current Wi-Fi network and those that are striving to adopt next-generation applications or interactive network experiences. With higher throughput, 802.11ac enables Compex acWave to multiply the performance of outdoor and indoor applications:


- *Outdoor: Point to Point & Point to Point + Coverage*  
Higher throughput for backhaul enables 3x faster data transmission, such as video streaming, at gigabit speeds, while accommodating high bandwidth that outdoor environments demand.
- *Indoor: more hops for mesh*  
Higher throughput also translates into an increase in the number of hops for MeshPoints, as the effect on backhaul performance is most significant – thus escalating the hops to many more.

# Specifications





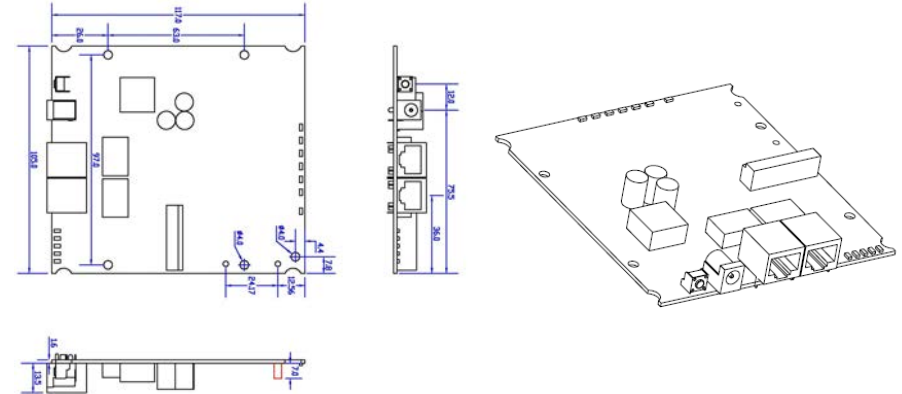


## AcWave board: WPJ344

SYSTEM INFORMATION																							
<b>Processor</b>	Qualcomm-Atheros AR9344 MIBS 74K																						
<b>System Memory</b>	128MB DDR2																						
<b>NOR Flash</b>	8MB (max 16MB optional)																						
<b>PCIe Slot</b>	9.2mm height miniPCIe slot																						
<b>Antenna Connector</b>	2 x U.FL																						
<b>On-board Radio</b>	<table border="1"> <thead> <tr> <th>Data Rate</th> <th>2.4GHz (aggregate)</th> <th>5GHz (aggregate)</th> </tr> </thead> <tbody> <tr> <td>6M</td> <td>18dBm</td> <td>15dBm</td> </tr> <tr> <td>54M</td> <td>13dBm</td> <td>11dBm</td> </tr> <tr> <td>HT20M CS0</td> <td>17dBm</td> <td>15dBm</td> </tr> <tr> <td>HT20M CS7</td> <td>13dBm</td> <td>10dBm</td> </tr> <tr> <td>HT40M CS0</td> <td>16dBm</td> <td>15dBm</td> </tr> <tr> <td>HT40M CS7</td> <td>13dBm</td> <td>10dBm</td> </tr> </tbody> </table>	Data Rate	2.4GHz (aggregate)	5GHz (aggregate)	6M	18dBm	15dBm	54M	13dBm	11dBm	HT20M CS0	17dBm	15dBm	HT20M CS7	13dBm	10dBm	HT40M CS0	16dBm	15dBm	HT40M CS7	13dBm	10dBm	
	Data Rate	2.4GHz (aggregate)	5GHz (aggregate)																				
	6M	18dBm	15dBm																				
	54M	13dBm	11dBm																				
	HT20M CS0	17dBm	15dBm																				
	HT20M CS7	13dBm	10dBm																				
	HT40M CS0	16dBm	15dBm																				
	HT40M CS7	13dBm	10dBm																				
	<b>Receiver Sensitivity</b>	<table border="1"> <thead> <tr> <th>Data Rate</th> <th>2.4GHz</th> <th>5GHz</th> </tr> </thead> <tbody> <tr> <td>6M</td> <td>-90dBm</td> <td>-90dBm</td> </tr> <tr> <td>54M</td> <td>-75dBm</td> <td>-74dBm</td> </tr> <tr> <td>HT20M CS0</td> <td>-90dBm</td> <td>-90dBm</td> </tr> <tr> <td>HT20M CS7</td> <td>-72dBm</td> <td>-71dBm</td> </tr> <tr> <td>HT40M CS0</td> <td>-88dBm</td> <td>-88dBm</td> </tr> <tr> <td>HT40M CS7</td> <td>-70dBm</td> <td>-70dBm</td> </tr> </tbody> </table>	Data Rate	2.4GHz	5GHz	6M	-90dBm	-90dBm	54M	-75dBm	-74dBm	HT20M CS0	-90dBm	-90dBm	HT20M CS7	-72dBm	-71dBm	HT40M CS0	-88dBm	-88dBm	HT40M CS7	-70dBm	-70dBm
		Data Rate	2.4GHz	5GHz																			
		6M	-90dBm	-90dBm																			
		54M	-75dBm	-74dBm																			
HT20M CS0		-90dBm	-90dBm																				
HT20M CS7		-72dBm	-71dBm																				
HT40M CS0	-88dBm	-88dBm																					
HT40M CS7	-70dBm	-70dBm																					
<b>Ethernet</b>	2 Gigabit ports with Auto-MDI/X																						
<b>Extras</b>	Serial Port, JTAG, Reset Button, Surge Arrestor, Watchdog Timer																						
<b>Power Solutions</b>	High voltage	DC Jack Input: 24-48V, Passive PoE: 24-48V, IEEE 802.3af PoE																					
	Low voltage	DC Jack Input: 9-24V, Passive PoE: 12-24V																					
<b>PoE Injector Compatibility</b>	IEEE 802.3af/at injectors(both end span and mid span) Passive injectors																						
<b>Power consumption (board only)</b>	5W																						
<b>ROHS Compliance</b>	Yes																						
<b>Humidity</b>	Operating: 5% to 95% (non-condensing) Storage: Max.90% (non-condensing)																						
<b>Temperature Range</b>	Operating: -20°C to 70°C Storage: -40°C to 90°C																						
<b>Dimension</b>	117 x 105 x 17 (mm)																						

## DIMENSION DRAWING



## RELATED PRODUCTS

<b>802.11ac miniPCIe</b>	WLE900V5-18	WLE900V5-23	WLE900VX	WLE600V5-18	WLE600V5-23
					
<b>Gigabit Power over Ethernet</b>	POE2408				
				- Output Voltage: 24VDC - Max Output Watts: 19W	
<b>USB Extension</b>				- 2 x USB 2.0 ports - 1 x miniPCIe-based USB 2.0 only interface (e.g. 3G modems)	

# Specifications

## AcWave radio: WLE600V5-18

SYSTEM INFORMATION	
<b>Chipset</b>	QCA9882
<b>Host Interface</b>	PCI-Express 1.1 Standard
<b>Operating Voltage</b>	3.3 VDC
<b>Power Consumption</b>	5W
<b>Antenna Connector</b>	2 x U.FL
<b>Frequency Range</b>	5.150 ~ 5.875 GHz
<b>Modulation Techniques</b>	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
<b>RoHS Compliance</b>	Yes
<b>Temperature Range</b>	Operating: -20°C to 70°C; Storage: -40°C to 90°C
<b>Humidity</b>	Operating: 5% to 95% (non-condensing) Storage: Max.90% (non-condensing)
<b>Dimensions</b>	50.95mm x 30 mm x 3.2 mm (H x W x D)

## AcWave radio: WLE600V5-23

SYSTEM INFORMATION	
<b>Chipset</b>	QCA9882
<b>Host Interface</b>	PCI-Express 1.1 Standard
<b>Operating Voltage</b>	3.3 VDC
<b>Power Consumption</b>	5W
<b>Antenna Connector</b>	2 x U.FL
<b>Frequency Range</b>	5.150 ~ 5.875 GHz
<b>Modulation Techniques</b>	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
<b>RoHS Compliance</b>	Yes
<b>Temperature Range</b>	Operating: -20°C to 70°C; Storage: -40°C to 90°C
<b>Humidity</b>	Operating: 5% to 95% (non-condensing) Storage: Max.90% (non-condensing)
<b>Dimensions</b>	50.95mm x 50 mm x 3.2 mm (H x W x D)

## AcWave radio: WLE900V5-18

SYSTEM INFORMATION	
<b>Chipset</b>	QCA9880 Version 2
<b>Host Interface</b>	PCI-Express 1.1 Standard
<b>Operating Voltage</b>	3.3 VDC
<b>Power Consumption</b>	5W
<b>Antenna Connector</b>	3 x U.FL
<b>Frequency Range</b>	5.150 ~ 5.875 GHz
<b>Modulation Techniques</b>	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
<b>RoHS Compliance</b>	Yes
<b>Temperature Range</b>	Operating: -20°C to 70°C; Storage: -40°C to 90°C
<b>Humidity</b>	Operating: 5% to 95% (non-condensing) Storage: Max.90% (non-condensing)
<b>Dimensions</b>	50.95mm x 30 mm x 3.2 mm (H x W x D)

## AcWave radio: WLE900V5-23

SYSTEM INFORMATION	
<b>Chipset</b>	QCA9880 Version 2
<b>Host Interface</b>	PCI-Express 1.1 Standard
<b>Operating Voltage</b>	3.3 VDC, 5V (compulsory and external) <sup>1</sup>
<b>Power Consumption</b>	7W
<b>Antenna Connector</b>	3 x MMCX Antenna Connector
<b>Frequency Range</b>	5.150 ~ 5.875 GHz
<b>Modulation Techniques</b>	OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
<b>RoHS Compliance</b>	Yes
<b>Temperature Range</b>	Operating: -20°C to 70°C; Storage: -40°C to 90°C
<b>Humidity</b>	Operating: 5% to 95% (non-condensing) Storage: Max.90% (non-condensing)
<b>Dimensions</b>	50.95mm x 50 mm x 3.2 mm (H x W x D)



# Specifications

AcWave radio: WLE600V5-18

TX SPECIFICATIONS										
	DataRate	TX Power (per chain)	TX Power (2 chains)	Tolerance		DataRate	TX Power (per chain)	TX Power (2 chains)	Tolerance	
802.11a	6Mbps	18dBm	21dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	18dBm	21dBm	±2dB	
	9Mbps	18dBm	21dBm	±2dB		MCS 1	18dBm	21dBm	±2dB	
	12Mbps	18dBm	21dBm	±2dB		MCS 2	18dBm	21dBm	±2dB	
	18Mbps	18dBm	21dBm	±2dB		MCS 3	18dBm	21dBm	±2dB	
	24Mbps	18dBm	21dBm	±2dB		MCS 4	18dBm	21dBm	±2dB	
	36Mbps	17dBm	20dBm	±2dB		MCS 5	16dBm	19dBm	±2dB	
	48Mbps	17dBm	20dBm	±2dB		MCS 6	16dBm	19dBm	±2dB	
	54Mbps	15dBm	18dBm	±2dB		MCS 7	15dBm	18dBm	±2dB	
				MCS 8		15dBm	18dBm	±2dB		
				MCS 9		14dBm	17dBm	±2dB		
5GHz 11n/11ac HT40	MCS 0	18dBm	21dBm	±2dB		5GHz 11ac HT80	MCS 0	18dBm	21dBm	±2dB
	MCS 1	18dBm	21dBm	±2dB			MCS 1	18dBm	21dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB			MCS 2	18dBm	21dBm	±2dB
	MCS 3	18dBm	21dBm	±2dB			MCS 3	18dBm	21dBm	±2dB
	MCS 4	18dBm	21dBm	±2dB			MCS 4	18dBm	21dBm	±2dB
	MCS 5	16dBm	20dBm	±2dB			MCS 5	16dBm	20dBm	±2dB
	MCS 6	16dBm	20dBm	±2dB	MCS 6		16dBm	20dBm	±2dB	
	MCS 7	15dBm	18dBm	±2dB	MCS 7		15dBm	18dBm	±2dB	
	MCS 8	15dBm	18dBm	±2dB	MCS 8		15dBm	18dBm	±2dB	
	MCS 9	13dBm	16dBm	±2dB	MCS 9		13dBm	16dBm	±2dB	
RX SPECIFICATIONS										
	DataRate	Sensitivity	Tolerance		DataRate	Sensitivity	Tolerance			
802.11a	6Mbps	-94dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	-94dBm	±2dB			
	9Mbps	-94dBm	±2dB		MCS 1	-94dBm	±2dB			
	12Mbps	-94dBm	±2dB		MCS 2	-92dBm	±2dB			
	18Mbps	-92dBm	±2dB		MCS 3	-88dBm	±2dB			
	24Mbps	-89dBm	±2dB		MCS 4	-84dBm	±2dB			
	36Mbps	-86dBm	±2dB		MCS 5	-81dBm	±2dB			
	48Mbps	-82dBm	±2dB		MCS 6	-78dBm	±2dB			
	54Mbps	-80dBm	±2dB		MCS 7	-77dBm	±2dB			
					MCS 8	-74dBm	±2dB			
					MCS 9	-71dBm	±2dB			
5GHz 11n/11ac HT40	MCS 0	-93dBm	±2dB		5GHz 11ac HT80	MCS 0	-89dBm	±2dB		
	MCS 1	-91dBm	±2dB			MCS 1	-88dBm	±2dB		
	MCS 2	-90dBm	±2dB			MCS 2	-85dBm	±2dB		
	MCS 3	-85dBm	±2dB			MCS 3	-81dBm	±2dB		
	MCS 4	-82dBm	±2dB			MCS 4	-79dBm	±2dB		
	MCS 5	-78dBm	±2dB			MCS 5	-75dBm	±2dB		
	MCS 6	-77dBm	±2dB	MCS 6		-74dBm	±2dB			
	MCS 7	-75dBm	±2dB	MCS 7		-72dBm	±2dB			
	MCS 8	-73dBm	±2dB	MCS 8		-70dBm	±2dB			
	MCS 9	-71dBm	±2dB	MCS 9		-68dBm	±2dB			





# Specifications

AcWave radio: WLE600V5-23

TX SPECIFICATIONS										
	DataRate	TX Power (per chain)	TX Power (2 chains)	Tolerance		DataRate	TX Power (per chain)	TX Power (2 chains)	Tolerance	
802.11a	6Mbps	23dBm	26dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	23dBm	26dBm	±2dB	
	9Mbps	23dBm	26dBm	±2dB		MCS 1	23dBm	26dBm	±2dB	
	12Mbps	23dBm	26dBm	±2dB		MCS 2	23dBm	26dBm	±2dB	
	18Mbps	23dBm	26dBm	±2dB		MCS 3	23dBm	26dBm	±2dB	
	24Mbps	23dBm	26dBm	±2dB		MCS 4	23dBm	26dBm	±2dB	
	36Mbps	23dBm	26dBm	±2dB		MCS 5	23dBm	26dBm	±2dB	
	48Mbps	21dBm	24dBm	±2dB		MCS 6	21dBm	24dBm	±2dB	
	54Mbps	19dBm	22dBm	±2dB		MCS 7	19dBm	22dBm	±2dB	
				MCS 8		17dBm	20dBm	±2dB		
				MCS 9		16dBm	19dBm	±2dB		
5GHz 11n/11ac HT40	MCS 0	23dBm	26dBm	±2dB		5GHz 11ac HT80	MCS 0	23dBm	26dBm	±2dB
	MCS 1	23dBm	26dBm	±2dB			MCS 1	23dBm	26dBm	±2dB
	MCS 2	23dBm	26dBm	±2dB			MCS 2	23dBm	26dBm	±2dB
	MCS 3	23dBm	26dBm	±2dB			MCS 3	23dBm	26dBm	±2dB
	MCS 4	23dBm	26dBm	±2dB			MCS 4	23dBm	26dBm	±2dB
	MCS 5	22dBm	25dBm	±2dB			MCS 5	22dBm	25dBm	±2dB
	MCS 6	21dBm	24dBm	±2dB	MCS 6		21dBm	24dBm	±2dB	
	MCS 7	19dBm	22dBm	±2dB	MCS 7		19dBm	22dBm	±2dB	
	MCS 8	17dBm	20dBm	±2dB	MCS 8		17dBm	20dBm	±2dB	
	MCS 9	15dBm	18dBm	±2dB	MCS 9		15dBm	18dBm	±2dB	
RX SPECIFICATIONS										
	DataRate	Sensitivity	Tolerance		DataRate	Sensitivity	Tolerance			
802.11a	6Mbps	-94dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	-94dBm	±2dB			
	9Mbps	-94dBm	±2dB		MCS 1	-94dBm	±2dB			
	12Mbps	-94dBm	±2dB		MCS 2	-92dBm	±2dB			
	18Mbps	-92dBm	±2dB		MCS 3	-88dBm	±2dB			
	24Mbps	-89dBm	±2dB		MCS 4	-84dBm	±2dB			
	36Mbps	-86dBm	±2dB		MCS 5	-81dBm	±2dB			
	48Mbps	-82dBm	±2dB		MCS 6	-78dBm	±2dB			
	54Mbps	-80dBm	±2dB		MCS 7	-77dBm	±2dB			
					MCS 8	-74dBm	±2dB			
					MCS 9	-71dBm	±2dB			
5GHz 11n/11ac HT40	MCS 0	-93dBm	±2dB		5GHz 11ac HT80	MCS 0	-89dBm	±2dB		
	MCS 1	-91dBm	±2dB			MCS 1	-88dBm	±2dB		
	MCS 2	-90dBm	±2dB			MCS 2	-85dBm	±2dB		
	MCS 3	-85dBm	±2dB			MCS 3	-81dBm	±2dB		
	MCS 4	-82dBm	±2dB			MCS 4	-79dBm	±2dB		
	MCS 5	-78dBm	±2dB			MCS 5	-75dBm	±2dB		
	MCS 6	-77dBm	±2dB	MCS 6		-74dBm	±2dB			
	MCS 7	-75dBm	±2dB	MCS 7		-72dBm	±2dB			
	MCS 8	-73dBm	±2dB	MCS 8		-70dBm	±2dB			
	MCS 9	-71dBm	±2dB	MCS 9		-68dBm	±2dB			



# Specifications

AcWave radio: WLE900V5-18

TX SPECIFICATIONS											
	DataRate	TX Power (per chain)	TX Power (3 chains)	Tolerance		DataRate	TX Power (per chain)	TX Power (3 chains)	Tolerance		
802.11a	6Mbps	18dBm	23dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	18dBm	23dBm	±2dB		
	9Mbps	18dBm	23dBm	±2dB		MCS 1	18dBm	23dBm	±2dB		
	12Mbps	18dBm	23dBm	±2dB		MCS 2	18dBm	23dBm	±2dB		
	18Mbps	18dBm	23dBm	±2dB		MCS 3	18dBm	23dBm	±2dB		
	24Mbps	18dBm	23dBm	±2dB		MCS 4	18dBm	23dBm	±2dB		
	36Mbps	17dBm	22dBm	±2dB		MCS 5	16dBm	21dBm	±2dB		
	48Mbps	17dBm	22dBm	±2dB		MCS 6	16dBm	21dBm	±2dB		
	54Mbps	15dBm	20dBm	±2dB		MCS 7	15dBm	20dBm	±2dB		
5GHz 11n/11ac HT40	MCS 0	18dBm	23dBm	±2dB	5GHz 11ac HT80	MCS 0	18dBm	23dBm	±2dB		
	MCS 1	18dBm	23dBm	±2dB		MCS 1	18dBm	23dBm	±2dB		
	MCS 2	18dBm	23dBm	±2dB		MCS 2	18dBm	23dBm	±2dB		
	MCS 3	18dBm	23dBm	±2dB		MCS 3	18dBm	23dBm	±2dB		
	MCS 4	18dBm	23dBm	±2dB		MCS 4	18dBm	23dBm	±2dB		
	MCS 5	16dBm	21dBm	±2dB		MCS 5	16dBm	21dBm	±2dB		
	MCS 6	16dBm	21dBm	±2dB		MCS 6	16dBm	21dBm	±2dB		
	MCS 7	15dBm	20dBm	±2dB		MCS 7	15dBm	20dBm	±2dB		
	MCS 8	15dBm	20dBm	±2dB		MCS 8	15dBm	20dBm	±2dB		
	MCS 9	13dBm	18dBm	±2dB		MCS 9	13dBm	18dBm	±2dB		
RX SPECIFICATIONS											
	DataRate	Sensitivity	Tolerance		DataRate	Sensitivity	Tolerance		Tolerance		
802.11a	6Mbps	-94dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	-94dBm	±2dB	5GHz 11ac HT80	MCS 0	-89dBm	±2dB
	9Mbps	-94dBm	±2dB		MCS 1	-94dBm	±2dB		MCS 1	-88dBm	±2dB
	12Mbps	-94dBm	±2dB		MCS 2	-92dBm	±2dB		MCS 2	-85dBm	±2dB
	18Mbps	-92dBm	±2dB		MCS 3	-88dBm	±2dB		MCS 3	-81dBm	±2dB
	24Mbps	-89dBm	±2dB		MCS 4	-84dBm	±2dB		MCS 4	-79dBm	±2dB
	36Mbps	-86dBm	±2dB		MCS 5	-81dBm	±2dB		MCS 5	-75dBm	±2dB
	48Mbps	-82dBm	±2dB		MCS 6	-78dBm	±2dB		MCS 6	-74dBm	±2dB
	54Mbps	-80dBm	±2dB		MCS 7	-77dBm	±2dB		MCS 7	-72dBm	±2dB
5GHz 11n/11ac HT40	MCS 0	-93dBm	±2dB	5GHz 11ac HT80	MCS 8	-74dBm	±2dB	5GHz 11ac HT80	MCS 8	-70dBm	±2dB
	MCS 1	-91dBm	±2dB		MCS 9	-71dBm	±2dB		MCS 9	-68dBm	±2dB
	MCS 2	-90dBm	±2dB		MCS 0	-89dBm	±2dB				
	MCS 3	-85dBm	±2dB		MCS 1	-88dBm	±2dB				
	MCS 4	-82dBm	±2dB		MCS 2	-85dBm	±2dB				
	MCS 5	-78dBm	±2dB		MCS 3	-81dBm	±2dB				
	MCS 6	-77dBm	±2dB		MCS 4	-79dBm	±2dB				
	MCS 7	-75dBm	±2dB		MCS 5	-75dBm	±2dB				
	MCS 8	-73dBm	±2dB		MCS 6	-74dBm	±2dB				
	MCS 9	-71dBm	±2dB		MCS 7	-72dBm	±2dB				

# Specifications

AcWave radio: WLE900V5-23

TX SPECIFICATIONS										
	DataRate	TX Power (per chain)	TX Power (3 chains)	Tolerance		DataRate	TX Power (per chain)	TX Power (3 chains)	Tolerance	
802.11a	6Mbps	23dBm	28dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	23dBm	28dBm	±2dB	
	9Mbps	23dBm	28dBm	±2dB		MCS 1	23dBm	28dBm	±2dB	
	12Mbps	23dBm	28dBm	±2dB		MCS 2	23dBm	28dBm	±2dB	
	18Mbps	23dBm	28dBm	±2dB		MCS 3	23dBm	28dBm	±2dB	
	24Mbps	23dBm	28dBm	±2dB		MCS 4	23dBm	28dBm	±2dB	
	36Mbps	23dBm	28dBm	±2dB		MCS 5	23dBm	28dBm	±2dB	
	48Mbps	21dBm	26dBm	±2dB		MCS 6	21dBm	26dBm	±2dB	
	54Mbps	19dBm	24dBm	±2dB		MCS 7	19dBm	24dBm	±2dB	
				MCS 8		17dBm	22dBm	±2dB		
				MCS 9		16dBm	21dBm	±2dB		
5GHz 11n/11ac HT40	MCS 0	23dBm	28dBm	±2dB		5GHz 11ac HT80	MCS 0	23dBm	28dBm	±2dB
	MCS 1	23dBm	28dBm	±2dB			MCS 1	23dBm	28dBm	±2dB
	MCS 2	23dBm	28dBm	±2dB			MCS 2	23dBm	28dBm	±2dB
	MCS 3	23dBm	28dBm	±2dB			MCS 3	23dBm	28dBm	±2dB
	MCS 4	23dBm	28dBm	±2dB			MCS 4	23dBm	28dBm	±2dB
	MCS 5	22dBm	27dBm	±2dB			MCS 5	22dBm	27dBm	±2dB
	MCS 6	21dBm	26dBm	±2dB	MCS 6		21dBm	26dBm	±2dB	
	MCS 7	19dBm	24dBm	±2dB	MCS 7		19dBm	24dBm	±2dB	
	MCS 8	17dBm	22dBm	±2dB	MCS 8		17dBm	22dBm	±2dB	
	MCS 9	15dBm	20dBm	±2dB	MCS 9		15dBm	20dBm	±2dB	
RX SPECIFICATIONS										
	DataRate	Sensitivity	Tolerance		DataRate	Sensitivity	Tolerance			
802.11a	6Mbps	-94dBm	±2dB	5GHz 11n/11ac HT20	MCS 0	-94dBm	±2dB			
	9Mbps	-94dBm	±2dB		MCS 1	-94dBm	±2dB			
	12Mbps	-94dBm	±2dB		MCS 2	-92dBm	±2dB			
	18Mbps	-92dBm	±2dB		MCS 3	-88dBm	±2dB			
	24Mbps	-89dBm	±2dB		MCS 4	-84dBm	±2dB			
	36Mbps	-86dBm	±2dB		MCS 5	-81dBm	±2dB			
	48Mbps	-82dBm	±2dB		MCS 6	-78dBm	±2dB			
	54Mbps	-80dBm	±2dB		MCS 7	-77dBm	±2dB			
					MCS 8	-74dBm	±2dB			
					MCS 9	-71dBm	±2dB			
5GHz 11n/11ac HT40	MCS 0	-93dBm	±2dB		5GHz 11ac HT80	MCS 0	-89dBm	±2dB		
	MCS 1	-91dBm	±2dB			MCS 1	-88dBm	±2dB		
	MCS 2	-90dBm	±2dB			MCS 2	-85dBm	±2dB		
	MCS 3	-85dBm	±2dB			MCS 3	-81dBm	±2dB		
	MCS 4	-82dBm	±2dB			MCS 4	-79dBm	±2dB		
	MCS 5	-78dBm	±2dB			MCS 5	-75dBm	±2dB		
	MCS 6	-77dBm	±2dB	MCS 6		-74dBm	±2dB			
	MCS 7	-75dBm	±2dB	MCS 7		-72dBm	±2dB			
	MCS 8	-73dBm	±2dB	MCS 8		-70dBm	±2dB			
	MCS 9	-71dBm	±2dB	MCS 9		-68dBm	±2dB			





# Specifications


## AcWave radio: WLE900VX

TX SPECIFICATIONS					RX SPECIFICATIONS				TX SPECIFICATIONS					RX SPECIFICATIONS			
	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance		Data Rate	Sensitivity	Tolerance		Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance		Data Rate	Sensitivity	Tolerance
<b>802.11 b/g</b>	6-24Mbps	19dBm	23dBm	±2dB	<b>802.11 b/g</b>	6Mbps	-94dBm	±2dB	<b>5 GHz 11n HT20</b>	MCS0	18dBm	23dBm	±2dB	<b>5 GHz 11n HT20</b>	MCS0	-93dBm	±2dB
	36Mbps	17dBm	22dBm	±2dB		36Mbps	-86dBm	±2dB		MCS1	18dBm	23dBm	±2dB		MCS1	-91dBm	±2dB
	48Mbps	17dBm	22dBm	±2dB		48Mbps	-82dBm	±2dB		MCS2	18dBm	23dBm	±2dB		MCS2	-90dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB		54Mbps	-80dBm	±2dB		MCS3	17dBm	22dBm	±2dB		MCS3	-85dBm	±2dB
<b>2.4 GHz 11n HT20</b>	MCS 0	19dBm	24dBm	±2dB	<b>2.4 GHz 11n HT20</b>	MCS 0	-94dBm	±2dB		MCS4	17dBm	22dBm	±2dB		MCS4	-82dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB		MCS1	-94dBm	±2dB		MCS5	14dBm	19dBm	±2dB		MCS5	-78dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB		MCS2	-92dBm	±2dB		MCS6	13dBm	18dBm	±2dB		MCS6	-77dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB		MCS3	-88dBm	±2dB		MCS7	13dBm	18dBm	±2dB		MCS7	-75dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB		MCS4	-84dBm	±2dB		MCS8	12dBm	17dBm	±2dB		MCS8	-73dBm	±2dB
	MCS 5	18dBm	23dBm	±2dB		MCS5	-81dBm	±2dB		MCS9	12dBm	17dBm	±2dB		MCS9	-71dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB		MCS6	-78dBm	±2dB		MCS0	18dBm	23dBm	±2dB		MCS0	-93dBm	±2dB
	MCS 7	13dBm	18dBm	±2dB		MCS7	-77dBm	±2dB		MCS1	18dBm	23dBm	±2dB		MCS1	-91dBm	±2dB
<b>2.4 GHz 11n HT40</b>	MCS 0	18dBm	23dBm	±2dB	<b>2.4 GHz 11n HT40</b>	MCS 0	-93dBm	±2dB	MCS2	18dBm	23dBm	±2dB	MCS2	-90dBm	±2dB		
	MCS 1	18dBm	23dBm	±2dB		MCS1	-91dBm	±2dB	MCS3	16dBm	21dBm	±2dB	MCS3	-85dBm	±2dB		
	MCS 2	18dBm	23dBm	±2dB		MCS2	-90dBm	±2dB	MCS4	16dBm	21dBm	±2dB	MCS4	-82dBm	±2dB		
	MCS 3	17dBm	22dBm	±2dB		MCS3	-85dBm	±2dB	MCS5	13dBm	18dBm	±2dB	MCS5	-78dBm	±2dB		
	MCS 4	17dBm	22dBm	±2dB		MCS4	-82dBm	±2dB	MCS6	12dBm	17dBm	±2dB	MCS6	-77dBm	±2dB		
	MCS 5	17dBm	22dBm	±2dB		MCS5	-78dBm	±2dB	MCS7	12dBm	17dBm	±2dB	MCS7	-75dBm	±2dB		
	MCS 6	15dBm	20dBm	±2dB		MCS6	-77dBm	±2dB	MCS8	11dBm	16dBm	±2dB	MCS8	-73dBm	±2dB		
	MCS 7	13dBm	18dBm	±2dB		MCS7	-75dBm	±2dB	MCS9	11dBm	16dBm	±2dB	MCS9	-71dBm	±2dB		
<b>802.11 a</b>	6-24Mbps	18dBm	23dBm	±2dB	<b>802.11 a</b>	6Mbps	-94dBm	±2dB	MCS0	18dBm	23dBm	±2dB	MCS0	-89dBm	±2dB		
	36Mbps	17dBm	22dBm	±2dB		36Mbps	-86dBm	±2dB	MCS1	18dBm	23dBm	±2dB	MCS1	-88dBm	±2dB		
	48Mbps	16dBm	21dBm	±2dB		48Mbps	-82dBm	±2dB	MCS2	18dBm	23dBm	±2dB	MCS2	-85dBm	±2dB		
	54Mbps	15dBm	20dBm	±2dB		54Mbps	-80dBm	±2dB	MCS3	15dBm	20dBm	±2dB	MCS3	-81dBm	±2dB		
<b>5 GHz 11n HT80</b>					<b>5 GHz 11n HT80</b>				MCS4	15dBm	20dBm	±2dB	MCS4	-79dBm	±2dB		
									MCS5	12dBm	17dBm	±2dB	MCS5	-75dBm	±2dB		
									MCS6	11dBm	16dBm	±2dB	MCS6	-74dBm	±2dB		
									MCS7	11dBm	16dBm	±2dB	MCS7	-72dBm	±2dB		
									MCS8	10dBm	15dBm	±2dB	MCS8	-70dBm	±2dB		
									MCS9	10dBm	15dBm	±2dB	MCS9	-68dBm	±2dB		

# Specifications

## 17dBi Directional Antenna

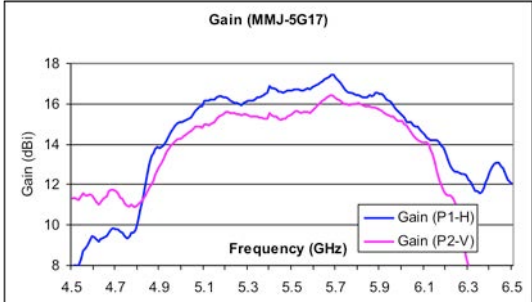
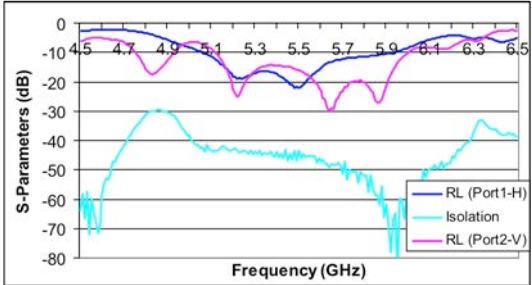
<b>Gain</b>	17dBi
<b>Radiation</b>	Directional
<b>Frequency Range</b>	5.1-5.9 GHz
<b>Polarization</b>	Dual – Polarization
<b>Azimuth -3dB Beamwidth</b>	Horizontal(Port 1): 30 degrees Vertical(Port 2): 33degrees
<b>Elevation -3dB Beamwidth</b>	Horizontal(Port 1): 17 degrees Vertical(Port 2): 17degrees
<b>Isolation</b>	-40dB (Max)
<b>Front-to-Back Ratio</b>	-30dB (Max)
<b>VSWR</b>	Horizontal (Port 1) : < 1: 1.87 Vertical (Port 2): < 1: 1.55
<b>Cross Polarisation Isolation</b>	-28dB (Max)
<b>SideLobe</b>	<-12dB
<b>Gain Plot</b>	
<b>Return Loss &amp; Isolation Plot</b>	

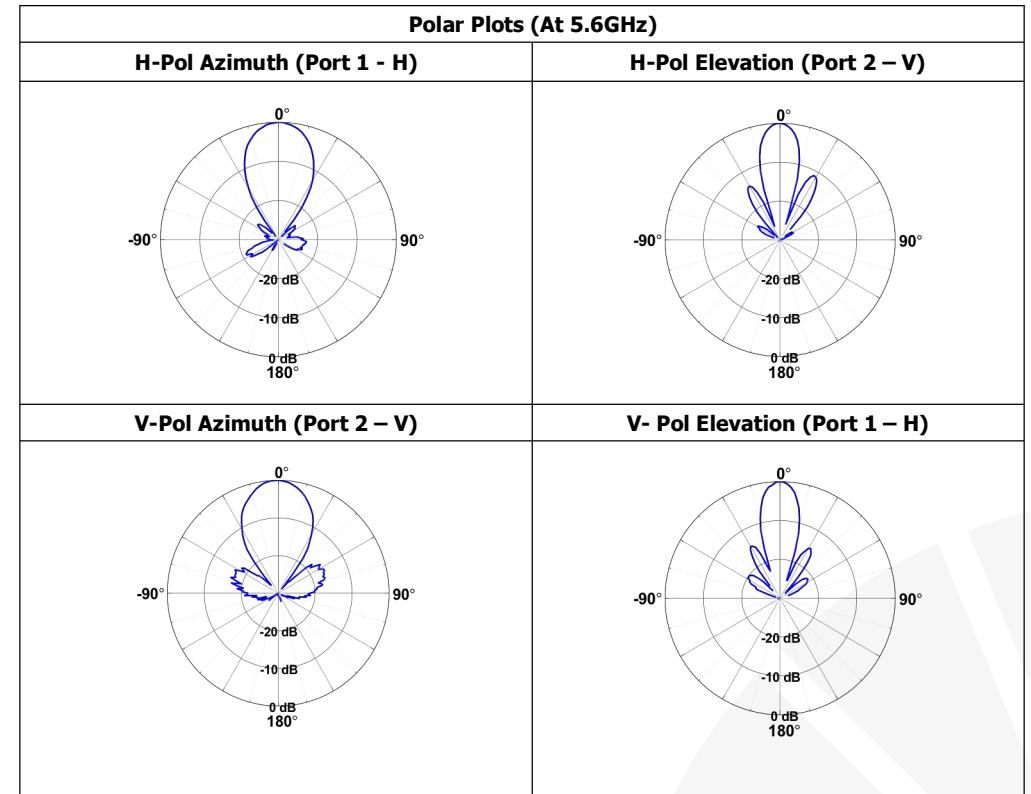




# Specifications

## 6.5dBi Omni Antenna
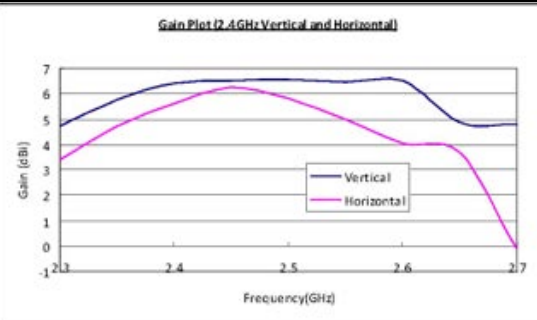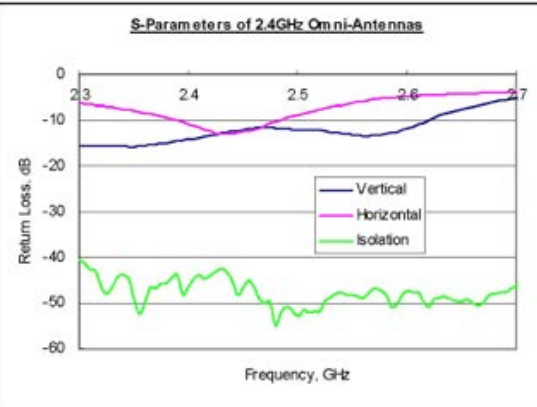
<b>Peak Gain</b>	7dBi
<b>Radiation</b>	Omni
<b>Frequency Range</b>	5.1GHz to 5.825GHz
<b>Polarization</b>	Dual – Polarization
<b>Azimuth (Horizontal) -3dB Beamwidth</b>	360 Degrees
<b>Elevation (Vertical) -3dB Beamwidth</b>	Horizontal(Port 1): 26 Degrees @ 2.45GHz Vertical(Port 2): 22 Degrees @ 2.45GHz
<b>VSWR</b>	Horizontal(Port 1): <1.88:1 Vertical(Port 2): <1.73:1
<b>Cross Polarization Isolation</b>	Horizontal(Port 1): < 12dB Vertical(Port 2): < 11dB
<b>Gain Plot</b>	 <p>Gain Plot (2.4GHz Vertical and Horizontal)</p>
<b>Return Loss</b>	 <p>S-Parameters of 2.4GHz Omni-Antennas</p>

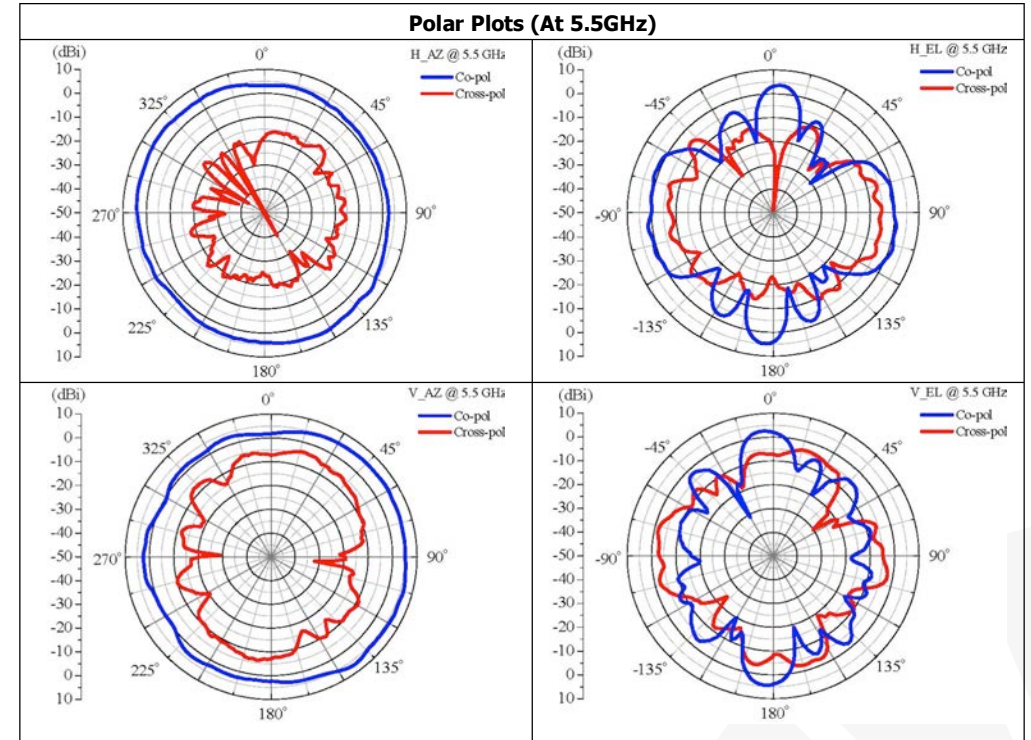



# About

## About Compex

From its inception in 1987, Compex has been specializing in product design and manufacturing and delivering superior OEM/ODM/JDM services in wireless communications. Dedicated to innovative design for RF wireless modules, host boards, and antenna, Compex also provides software design, product testing and certification, as well as fully customized design and manufacturing. Our wireless communications solution and services encompass both indoor and outdoor mesh network, hotspot, and subscriber units.

Our mission is to develop products with unparalleled features and consistent performance at highly competitive cost. With our factory strategically located in China, we have easy access to engineering resources as well as a wider selection of components – therefore reducing production cost and time, accelerating speed to market, and enhancing customer competitiveness. All these advantages enable Compex to address customers' most pressing issues with meticulous care and speed – without compromising your budget.

As an industry leading manufacturer, Compex further leverages its excellent R&D capabilities and partners with global customers to develop tailored end-to-end wireless solutions, from product concept to mass production – ensuring seamless experience for enterprises, system operators, and content service providers.

## Contact Us

### Corporate Headquarters

Compex Systems Pte Ltd  
135 Joo Seng Road #08-01  
Singapore 368363  
Tel: 65 6286 2086  
Fax: 65 6280 9947

### Manufacturing Plant

Compex (Suzhou) Co. Ltd  
中国江苏省苏州工业园娄封北区,  
创投工业纺 12 幢(215122)  
12, ChuangTou Industrial Square LouFeng North,  
Suzhou Industrial Park Suzhou, P.R. China 215122  
Tel: 86 (512) 6295 0050  
Fax: 86 (512) 6295 0026

Visit our website: [www.compex.com.sg](http://www.compex.com.sg)

Find us on Facebook: [www.facebook.com/compexsystems](https://www.facebook.com/compexsystems)