


2.4GHz/5GHz WiFi + Bluetooth Module Evaluation Kit Designed for WLAN/BT and Low-Energy Communications

Model: WSD377 EVK

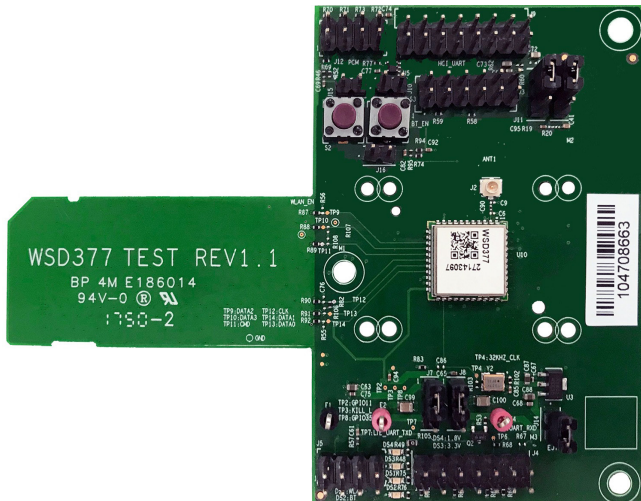

KEY FEATURES

- Evaluating the WSD377 which is based on the Qualcomm Atheros QCA9377
- WSD377 is a single-die wireless local area network (WLAN) and Bluetooth (BT) combination solution
- Supports 1x1 IEEE 802.11b/g/n at 2.4GHz
- Supports 1x1 IEEE 802.11a/n/ac at 5GHz
- WSD377 provides a highly integrated WLAN system-on-chip (SoC) for 5 GHz 802.11ac, or 2.4 GHz/5 GHz 802.11n WLAN applications
- Supports Bluetooth 5.0 + HS, BLE, and ANT+ with backward compatibility for BT 1.x, BT 2.x, BT4.2 + Enhanced Data Rate
- Supports 20/40MHz at 2.4GHz and supports 20/40/80MHz at 5GHz
- Supports multiuser MIMO
- Supports BT-WLAN coexistence and ISM-LTE coexistence
- Supports Dynamic Frequency Selection (DFS)

Specifications

Chipset	QCA9377
Device Variant	QCA9377-3
System Memory	OTP
Host Interface	SDIO, PCM, UART, JTAG
Operating Voltage	3.3V DC power supply and SDIO supply of 1.8V or 3.3V
WLAN Frequency Range	2.412GHz to 2.472GHz, or 5.180GHz to 5.825GHz, selectable dual band
Bluetooth Frequency Range	2.402GHz to 2.480GHz
Power Consumption (Board only)	3.83W (Max)
Modulation Techniques	WiFi: CCK, OFDM - BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM Bluetooth: FHSS, GFSK, DPSK, DQPSK
Temperature Range	Operating: -20°C to 70°C Storage: -40°C to 90°C
Humidity	Operating: 5% to 95% (non-condensing) Storage: Max. 90% (non-condensing)
Dimensions (W x H x D) in mm	101 x 78 x 12

RF Performance Table for 2.4GHz

	Data Rate	TX Power (per chain)	Tolerance
2.4GHz 802.11b	1Mbps	16dBm	±2dB
	2Mbps	16dBm	±2dB
	5.5Mbps	16dBm	±2dB
	11Mbps	16dBm	±2dB
2.4GHz 802.11g	6Mbps	15dBm	±2dB
	9Mbps	15dBm	±2dB
	12Mbps	15dBm	±2dB
	18Mbps	15dBm	±2dB
	24Mbps	15dBm	±2dB
	36Mbps	15dBm	±2dB
	48Mbps	14dBm	±2dB
54Mbps	13dBm	±2dB	
2.4GHz 802.11n HT20	MCS 0	14dBm	±2dB
	MCS 1	14dBm	±2dB
	MCS 2	14dBm	±2dB
	MCS 3	14dBm	±2dB
	MCS 4	14dBm	±2dB
	MCS 5	14dBm	±2dB
	MCS 6	13dBm	±2dB
	MCS 7	13dBm	±2dB
2.4GHz 802.11n HT40	MCS 8	13dBm	±2dB
	MCS 0	14dBm	±2dB
	MCS 1	14dBm	±2dB
	MCS 2	14dBm	±2dB
	MCS 3	14dBm	±2dB
	MCS 4	14dBm	±2dB
	MCS 5	14dBm	±2dB
	MCS 6	13dBm	±2dB
	MCS 7	13dBm	±2dB
	MCS 8	13dBm	±2dB
MCS 9	13dBm	±2dB	
Bluetooth	1Mbps	8dBm	±2dB
	2Mbps	8dBm	±2dB
	3Mbps	8dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	-96dBm	±2dB
	2Mbps	-90dBm	±2dB
	5.5Mbps	-88dBm	±2dB
	11Mbps	-87dBm	±2dB
2.4GHz 802.11g	6Mbps	-90dBm	±2dB
	9Mbps	-88dBm	±2dB
	12Mbps	-87dBm	±2dB
	18Mbps	-85dBm	±2dB
	24Mbps	-83dBm	±2dB
	36Mbps	-80dBm	±2dB
	48Mbps	-76dBm	±2dB
54Mbps	-74dBm	±2dB	
2.4GHz 802.11n HT20	MCS 0	-89dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-84dBm	±2dB
	MCS 3	-80dBm	±2dB
	MCS 4	-77dBm	±2dB
	MCS 5	-75dBm	±2dB
	MCS 6	-72dBm	±2dB
	MCS 7	-71dBm	±2dB
2.4GHz 802.11n HT40	MCS 8	-67dBm	±2dB
	MCS 0	-89dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-84dBm	±2dB
	MCS 3	-80dBm	±2dB
	MCS 4	-76dBm	±2dB
	MCS 5	-72dBm	±2dB
	MCS 6	-70dBm	±2dB
	MCS 7	-69dBm	±2dB
	MCS 8	-65dBm	±2dB
MCS 9	-64dBm	±2dB	
Bluetooth	1Mbps	-92dBm	±2dB
	2Mbps	-92dBm	±2dB
	3Mbps	-85dBm	±2dB

RF Performance Table for 5GHz



	Data Rate	TX Power (per chain)	Tolerance
5GHz 802.11a	6Mbps	11dBm	±2dB
	9Mbps	11dBm	±2dB
	12Mbps	11dBm	±2dB
	18Mbps	11dBm	±2dB
	24Mbps	11dBm	±2dB
	36Mbps	11dBm	±2dB
	48Mbps	10dBm	±2dB
	54Mbps	10dBm	±2dB
	5GHz 802.11n/ac HT20	MCS 0	11dBm
MCS 1		11dBm	±2dB
MCS 2		11dBm	±2dB
MCS 3		10dBm	±2dB
MCS 4		10dBm	±2dB
MCS 5		10dBm	±2dB
MCS 6		7dBm	±2dB
MCS 7		7dBm	±2dB
MCS 8		7dBm	±2dB
5GHz 802.11n/ac HT40	MCS 0	10dBm	±2dB
	MCS 1	10dBm	±2dB
	MCS 2	10dBm	±2dB
	MCS 3	9dBm	±2dB
	MCS 4	9dBm	±2dB
	MCS 5	6dBm	±2dB
	MCS 6	6dBm	±2dB
	MCS 7	6dBm	±2dB
	MCS 8	6dBm	±2dB
	MCS 9	6dBm	±2dB
5GHz 802.11ac HT80	MCS 0	9dBm	±2dB
	MCS 1	9dBm	±2dB
	MCS 2	9dBm	±2dB
	MCS 3	8dBm	±2dB
	MCS 4	8dBm	±2dB
	MCS 5	8dBm	±2dB
	MCS 6	6dBm	±2dB
	MCS 7	6dBm	±2dB
	MCS 8	6dBm	±2dB
	MCS 9	6dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	-91dBm	±2dB
	9Mbps	-89dBm	±2dB
	12Mbps	-88dBm	±2dB
	18Mbps	-86dBm	±2dB
	24Mbps	-82dBm	±2dB
	36Mbps	-79dBm	±2dB
	48Mbps	-74dBm	±2dB
	54Mbps	-73dBm	±2dB
	5GHz 802.11n/ac HT20	MCS 0	-90dBm
MCS 1		-88dBm	±2dB
MCS 2		-85dBm	±2dB
MCS 3		-82dBm	±2dB
MCS 4		-78dBm	±2dB
MCS 5		-74dBm	±2dB
MCS 6		-72dBm	±2dB
MCS 7		-71dBm	±2dB
MCS 8		-66dBm	±2dB
5GHz 802.11n/ac HT40	MCS 0	-88dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-83dBm	±2dB
	MCS 3	-79dBm	±2dB
	MCS 4	-76dBm	±2dB
	MCS 5	-71dBm	±2dB
	MCS 6	-70dBm	±2dB
	MCS 7	-68dBm	±2dB
	MCS 8	-64dBm	±2dB
	MCS 9	-63dBm	±2dB
5GHz 802.11ac HT80	MCS 0	-83dBm	±2dB
	MCS 1	-80dBm	±2dB
	MCS 2	-78dBm	±2dB
	MCS 3	-74dBm	±2dB
	MCS 4	-71dBm	±2dB
	MCS 5	-69dBm	±2dB
	MCS 6	-65dBm	±2dB
	MCS 7	-63dBm	±2dB
	MCS 8	-60dBm	±2dB
	MCS 9	-59dBm	±2dB

Component Map

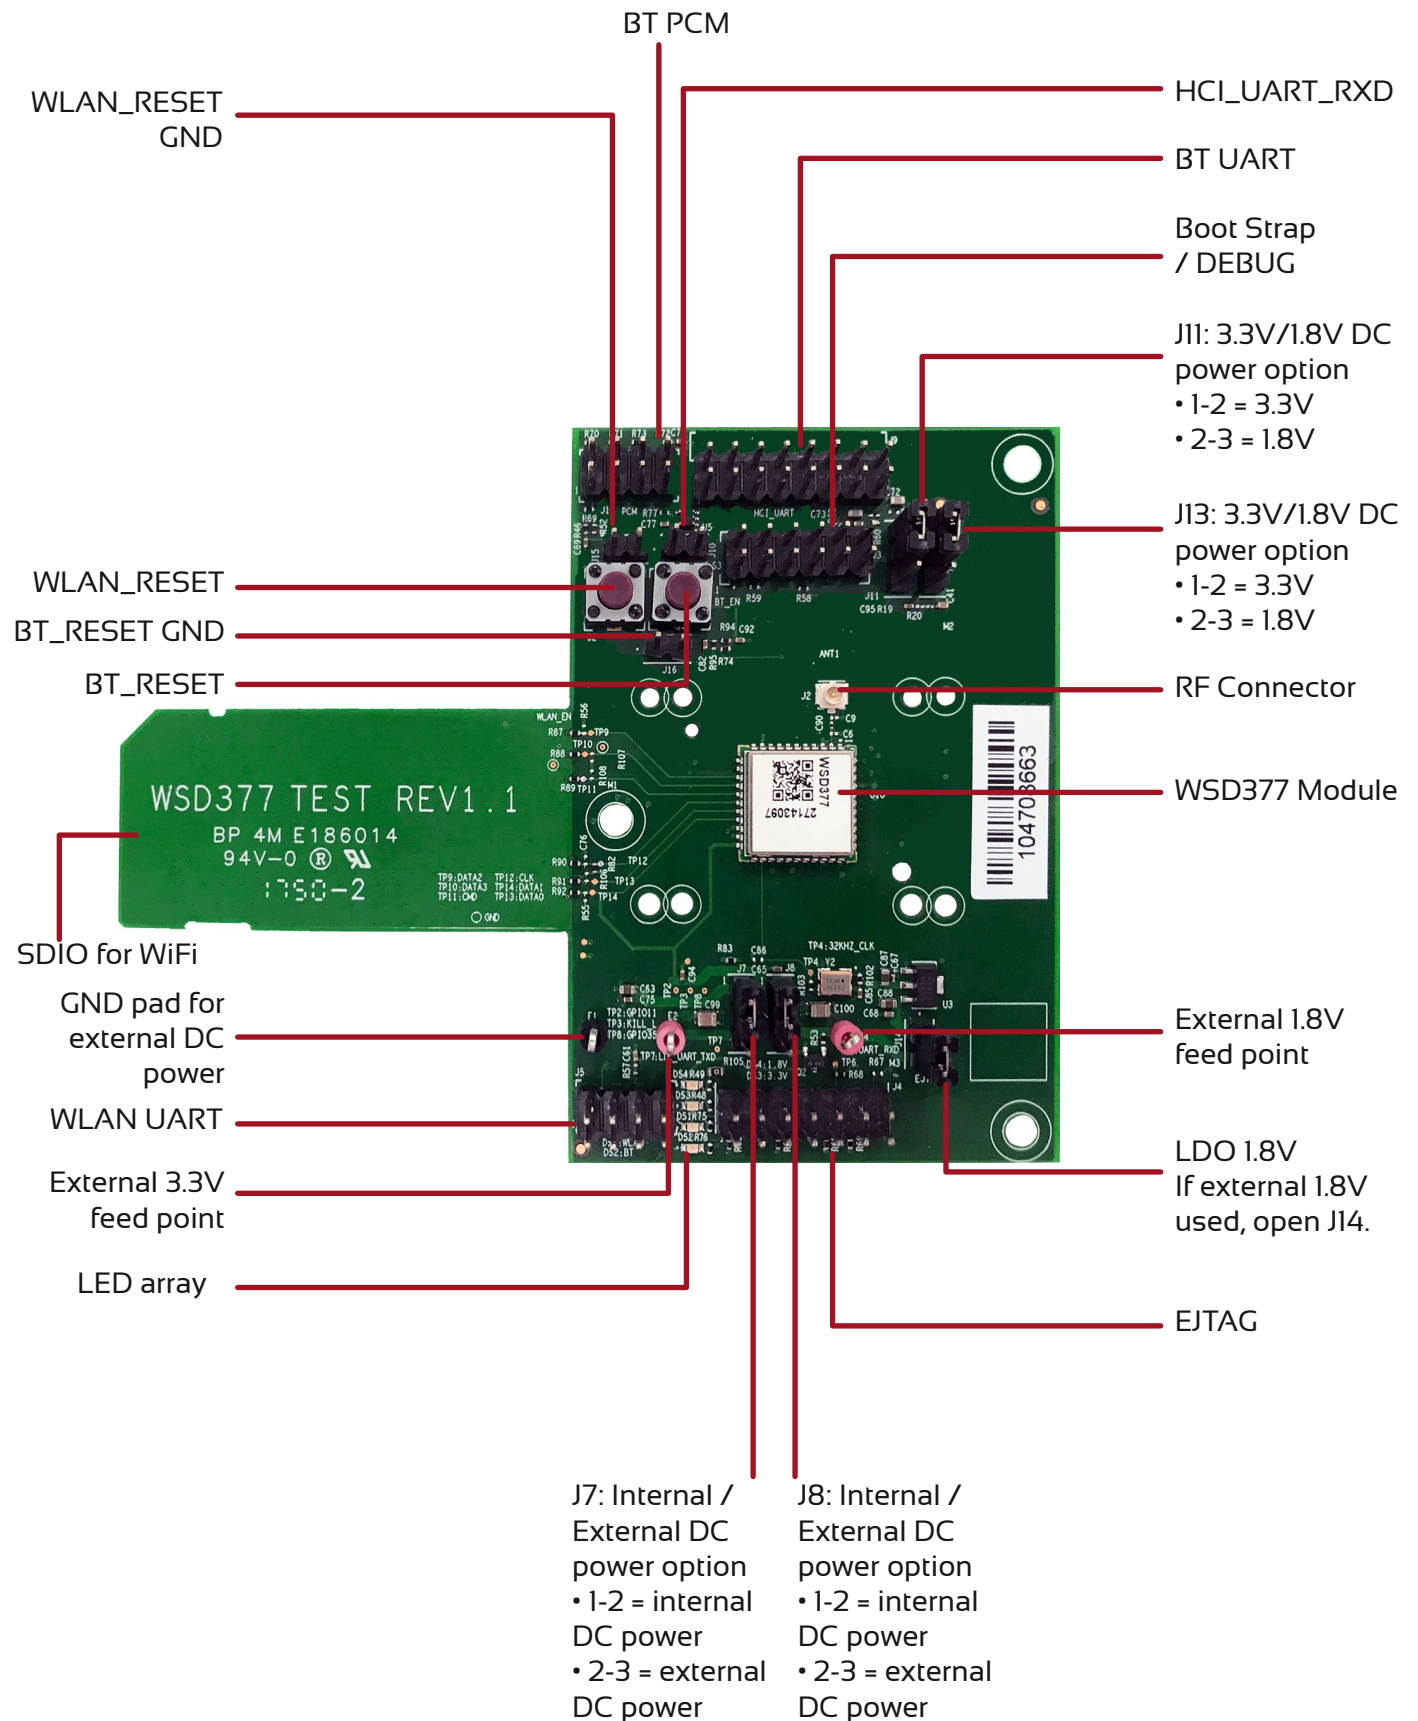

Dimensional Drawing of WSD377

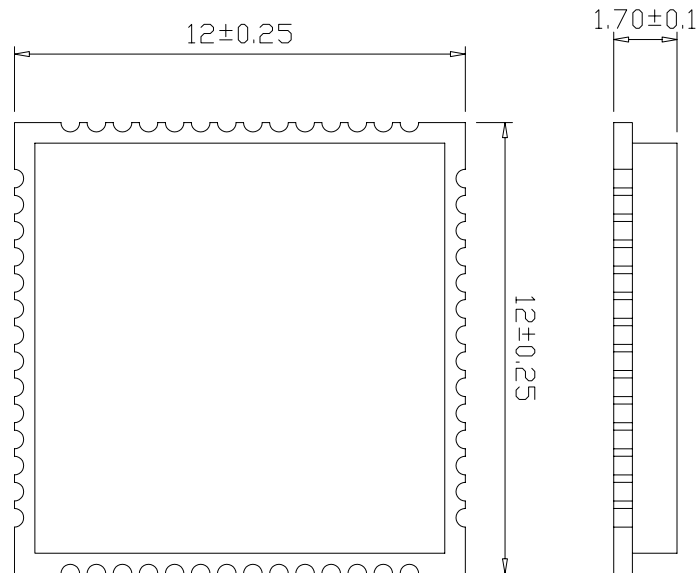

All dimensions are in mm.

Ordering Configuration

Item Code	Model	Description
WSD377 EVAL-R1.1	WSD377 EVK	WSD377 evaluation kit with 1x1 WiFi+Bluetooth