



EOC Slave

- Four 10/100M auto-negotiation Ethernet ports
- 35/47.42/54.65/87 type optional
- DC 12V power input

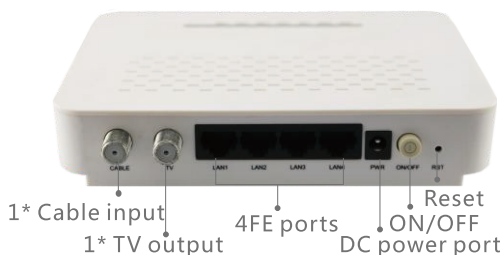


WiFi EOC Slave

- 4*100M auto-negotiation Ethernet port
- Support the isolation of slave under one master
- 19dBm high power wireless
- 2*5dBi External antenna
- 35/47.42/54.65/87 type optional
- DC 12V power input

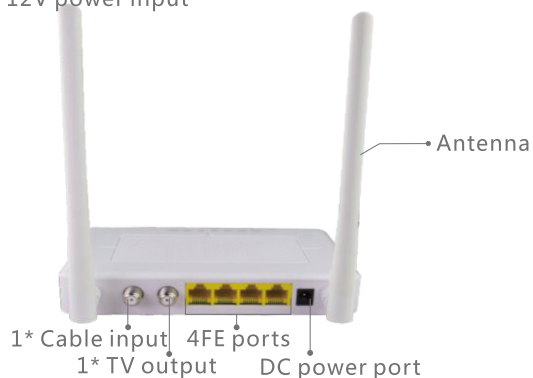

Typical Scenario – EPON/GPON + EOC Network for CATV Operator

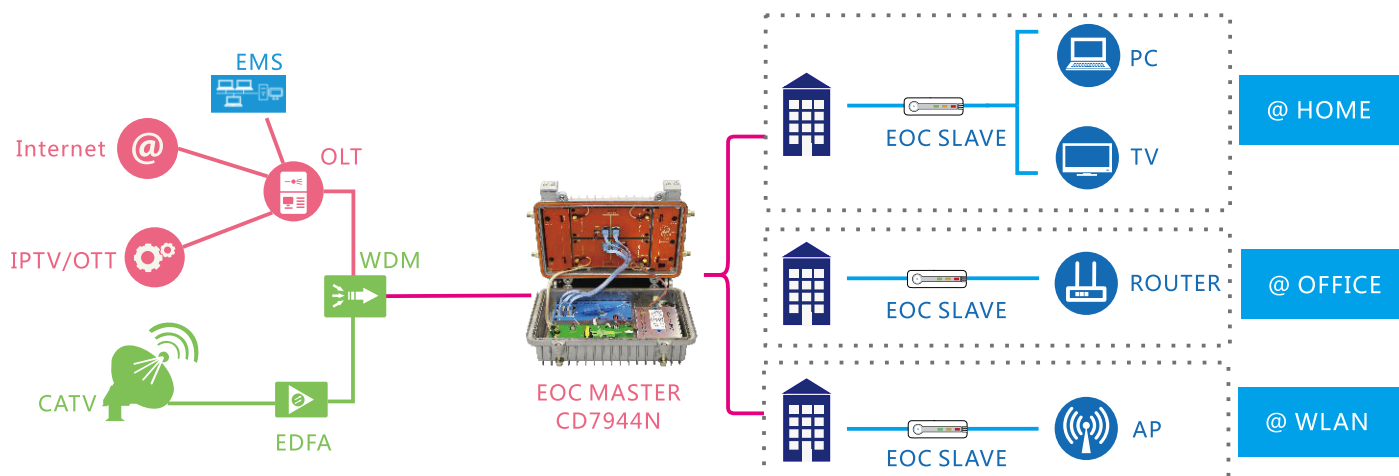

Ordering Information

Model	Description
CD7944N	Built-in one xPON ONU Module, one OR module and two 74 series chipset EOC Modules; one xPON uplink port, one CATV optical input, four TV+data mixed output port, CATV RF output 104dBu@each port, Outdoor waterproof designed. 90-264VAC power supply or 60VAC Cable line power supply feed in and out optional, 65/87 H/L filter is default, 35/47, 42/54 H/L filter is optional.
CD5204W	4*10/100M ports, 2.4G 300Mbps WIFI, 2 external antenna.1 TV output port, 1 mixed input port, 35/47.42/54.65/87 filter optional, DC 12V power.
CD5204	4*10/100M Ethernet ports, 1 TV output port, 1 mixed input port,35/47.42/54.65/87 type optional, DC 12V power.

